

RATE OF RISE HEAT DETECTOR (FMD-WS19L)


Advantages

- * Mechanical operating principles ensure the long-term durability and the least malfunction
- * Self-restoring function ensures the elements repeatedly use
- * The exhaust valve of R.O.R Heat Detector part uses optical fiber glass capillary tube that's heat-resistant and moisture-proof to avoid false alarms



Effective Alert Area

HEIGHT/CONSTRUCTION	UNDER 4 M	4M ~ 8M
Fire-Proof Building	70 M ²	35 M ²
Ordinary Buiding	40 M ²	25 M ²

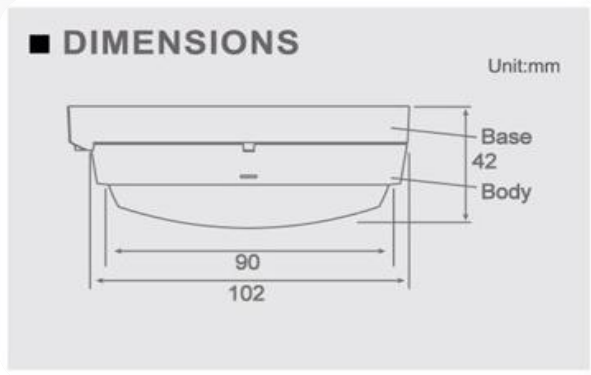

Specification

MODEL NO.	FMD-WS19L			SENSITIVITY SETTING	Comply to EN54, CNS
TYPE	2-wire	3-wire	4-wire	AMBIENT TEMP.	-10°C ~ 55°C
VOLTAGE RANGE	12V ~ 30V DC			AMBIENT HUMIDITY	0 ~ 95%
ALARM CURENT	24V DC 30mA			MATERIAL	Fire-Proof plastics
				DIMENSIONS	102(Dia.) x 42(H) mm
CONTACT RATING	N/A		1A@30V DC	WEIGHT	130g
POLARIZATION	Non-polarized	Polarized	Non-polarized	COLOR	White